



Discover Telemecanique Sensors

Simplify your project with the right
technology and expert service
for any job.



nz.rs-online.com



Contents

- 3 OsiSense XS
- 4 Safety Switches
- 5 Photoelectric Sensors
- 6 Proximity Sensors
- 7 Limit Switches

Join the conversations



Terms & conditions

To view our latest prices, charges and full terms see RS Conditions of Sale as set out on-line at au.rs-online.com. Prices correct at the time of going to print, prices exclude GST. Published by: RS Components Pty Ltd, 25 Pavesi Street Smithfield NSW 2164

RS Components Pty Ltd
RS are trademarks of RS Components Limited.
An Electrocomponents Company.



Save time with one-stop buying

Take advantage of our vast range to make us the one-stop supplier for all the parts you want, at competitive prices.



Availability and breadth of range

We can provide all the necessary components with great prices and fast delivery.



Additional support

We're here and happy to help!
You can contact our friendly customer service team on **1300 656 636** or ozorder@rs-components.com.



Visit nz.rs-online.com

Making Sense of Sensors

Choose Telemecanique Sensors and simplify your project with the right technology and expert service for any job.

As a global leader in the sensors business, Telemecanique Sensors help their customers select the right technology to get the best performance and reliability from their machines.

Focused on 3 core values – Simplicity, Proximity and Expertise – Telemecanique have become experts in factory automation sensors as well as specialists in demanding applications, making customers lives “simply easy!”.

RS Components stocks a full range of **Telemecanique sensors** to satisfy any application from factory to process automation, from RFID to load cell.

Discover **Telemecanique Sensors** today!



OsiSense XS non-flush inductive sensors



Increased sensing capacity in a compact, robust design

OsiSense™ XS non-flush inductive sensors deliver the **first E2-certified general purpose range on the market**. The result? Superior electromagnetic field immunity in a smaller package.

Greater sensing distance and detection capacity

OsiSense XS provides flexible setup and reliable performance — even in the harshest environments.

Compact and easy to integrate

Choose from two short-body sizes (12 mm and 18 mm) or the renewed 30 mm sensors.

Whether for mobile equipment, material handling, packaging, automatic assembly, escalators, or other demanding applications, you can count on OsiSense XS.

Simply easy!™



Visit nz.rs-online.com

XCSA Safety Interlock Switches

- 3 positive opening contacts as standard (on guard opening)
- A key operated lock enables positive locking of the guard
- Optional version with orange LED to indicate guard open/closed



263-3595	1NC + 2NO	XCSA502
397-2166	3NC	XCSA801
252-3858	Flexible actuator	XCSZ03

XY2-CE Cable Switch

- Emergency stop trip wire switch designed to reduce the risk of injury to persons and damage either to machines or work in progress
- They can be tripped by a single human action when a normal emergency stop function is not available and will also trip in the event of the trip wire breaking



742-3829 Right Side, 50m, 2NO/2NC XY2CE1A296

XCS-DMR Cylindrical safety switch

- 1 approach direction
- 8mm tolerance to misalignment
- Coded reed technology - switch cannot be totally defeated by a simple magnet
- Cylindrical plastic housing



766-1703 5m, 2NO 1NO XCSDMR7915

XCSA Miniature Safety Interlock Switches

- 2 positive opening contacts as standard, on guard opening
- Head rotates in 90° steps giving 8 actuator entry points
- Minimum operating force for positive opening: 15N



252-3864	1NO+NC	XCSPA591
296-4675	2N/C	XCSPA792
252-3870	Straight actuator	XCSZ11
252-3886	T actuator	XCSZ12

XY2-CH Cable Switch

- For machine tools, conveyers & handling applications
- Recommended distance between cable supports: 5m
- Built-in turnbuckle accessory
- Pushbutton reset



742-3924 Straight, 15m, 2NC XY2CH13270H29

XCS-E Solenoid Interlock Switches

- Key operated lock to allow authorised override of solenoid (key supplied)
- 2 LED indicators (orange/guard open, green/guard closed, key in locked position)
- Heavy duty metal compact style to IP67
- Turret heads can be rotated through 360° in 90 steps



263-3725	2NO + 1NC	XCSE5312
263-3753	2NC+1NO	XCSE7312

Preventa XCS-DMP Magnetic Safety Switches

- Actuation on 3 sides: face to face and face to side
- 8mm tolerance to misalignment (5mm for XCS-DMC)
- Coded reed technology - switch cannot be totally defeated by a simple magnet



422-5095	2 NC + 1 NO - 1 NC staggered - 2m	XCSDMP7002
422-5089	1 NC + 2 NO - 1 NO staggered - 2m	XCSDMP5012

XY2CZ105 Rope Pull Cable

- Cables galvanised with a red sheath o support the Preventa XY2C rope pull switches



609-1945 50m XY2CZ105

Preventa XCS Safety Rotating Hinge Switch

- Ideal for light industrial machines fitted with hinged or rotary protective covers with small opening radius e.g. double gate guards
- 2 outputs
- 5° displaced tripping angle
- 4 position turret head



360-4403 2NC, M16 x 1.5 XCSPR752

Osiconcept XUK Through Beam photoelectric sensor

- Four modes of detection in one unit
- Easy set-up at the touch of a button
- Self teach precise set-up 'multi-mode detection'



444-3530 30m PNP M12 conn XUK0AKSAM12

XUB Optimum cylindrical diffuse photoelectric sensor

- M18 Optimum cylindrical sensors in metallic casing
- For use in DC circuit applications. Solid-state PNP transistor output (NO or NC)
- Supply Voltage 10 → 24 Vdc



695-6823 M18, 0.6M, PNP NO XUB5BPANM12

Osiris XUB Osiconcept photo-electric sensor

- Four modes of detection in one unit
- Easy set-up at the touch of a button
- Self teach precise set-up
- Sensing distance dependent on mode of operation



444-3401 Barrel, M18 PNP XUB0APSNM12

OsiSense XU Retro-reflective Photoelectric Sensor

- Service alarm output
- Sensing distance 7000 mm
- Response time 25ms
- LED alignment and output indicators



512-4640 7m, Compact 50 x 50 XUK1ARCNL2

XUB Osiconcept photo-electric sensor

- Four modes of detection in one unit
- Easy set-up at the touch of a button
- Self teach precise set-up multi-mode detection
- Sensing distance dependent on mode of operation



444-3445 Retro-Reflective, Through Beam (Receiver) XUB0BPSNL2

Reflectors For Use With XU Series

- A range of Telemecanique square reflectors for use with the OsiSense XU series of Photoelectric sensors



324-1585	100 x 100mm	XUZC100
281-1767	80mm dia	XUZC80
281-1751	50 x 50mm	XUZC50

Osiris XUX Long Distance Photoelectric Sensors

- Four modes of detection in one unit
- Easy set-up at the touch of a button
- Self teach precise set-up 'multi-mode detection'



444-3619	Diffuse, Retro-Reflective, Through Beam (Receiver)	XUX0ARCTT16
444-3625	Through Beam (Emitter)	XUX0ARCTT16T

OsiSense XUM Miniature Photoelectric Detector

- Four modes of detection in one unit
- Easy set-up at the touch of a button
- Self teach precise set-up multi-mode detection
- Sensing distance dependent on mode of operation



444-3489 Multimode, 10m PNP XUM0APSAL2

OsiSense XX Cylindrical Ultrasonic Sensor


- IP67 rated
- M18 cylindrical body
- 4 to 20 mA analogue output
- Precise object detection of any material



753-0511 M18, 4-20mA - 0.5m XX918A3C2M12

Osi Optimum Proximity Sensors

- Flush-mountable inductive proximity sensors, designed for essential and repetitive applications
- 2m cable pre-wired versions (IP68 sealed)

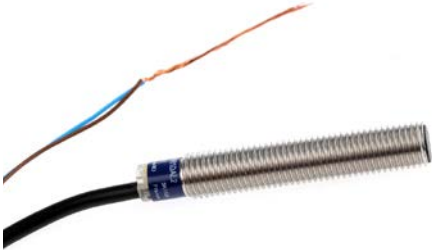

512-4426	1.5mm, M8 × 1, NO	XS508B1DAL2
444-3243	2.5mm M8 × 1, PNP	XS608B1PAL2

OsiSense XS 8mm Inductive proximity sensor

- 2 & 3 wire controlled devices
- LED status display
- Operating temperature range: -25 → +70° C
- Reverse polarity and short circuit protection (dc types only)



444-3293	M18 × 1, PNP	XS618B1PAM12
----------	--------------	--------------

OsiSense XS 4mm Inductive Sensor

- Twice nominal sensing distance
- Flush mount
- Fast switching frequency
- 2 & 3 wire controlled devices



444-3271	4mm, PNP	XS612B1PAM12
----------	----------	--------------

OsiSense XS 4mm Inductive proximity sensors

- Twice nominal sensing distance
- Flush mount
- Fast switching frequency
- 2 & 3 wire controlled devices



695-6766	M12 × 1, NC	XS612B1MBL2
444-3322	M12 × 1, NO	XS612B1MAL2
444-3265	M12 × 1, PNP	XS612B1PAL2

Osiprox Inductive Proximity Sensor

- Flat format
- Flush or non flush mountable versions
- LED status display
- Operating temperature range -25 to +70° C



444-3192	PNP Non-Flush Mount	XS8D1A1PAM12
----------	---------------------	--------------

OsiSense XS 15mm Inductive Sensor

- 2 & 3 wire controlled devices
- LED status display
- Operating temperature range: -25 → +70° C
- Reverse polarity and short circuit protection



444-3316	15mm, PNP	XS630B1PAM12
----------	-----------	--------------

OsiSense XS 8mm Inductive proximity sensors

- 2 & 3 wire controlled devices
- LED status display
- Operating temperature range: -25 → +70° C
- Reverse polarity and short circuit protection (dc types only)



609-7369	M18 × 1, NC	XS618B1MBL2
444-3344	M18 × 1, NO	XS618B1MAL2
444-3287	M18 × 1, PNP	XS618B1PAL2

OsiSense XS Cylindrical M30 Inductive proximity sensor

- Adjustment of speed threshold by potentiometer
- 120 to 3000 impulses/minute (High speed types)
- 6 to 150 impulses/minute (Low speed types)
- LED status display



283-482	15mm, NC	XS630B1MBL2
608-5748	10mm, NC	XSAV11801
281-1442	10mm, NO	XSAV12801
444-3366	15mm, NO	XS630B1MAL2

5m Female Cable & Connector

- Accessories for use with Telemecanique Osisonic Ultrasonic Sensors



612-2235	M12 4 Pin Straight	XZCP114IL5
----------	--------------------	------------

XCKJ Snap Action Lever Limit Switch

- Rated 240V 3A at AC15 10A lth
- Snap action NC contacts with positive opening operation
- Comes with a pre-tapped ½" NPT cable gland entry



700-4309	NO/NC, 240V	XCKJ10541H29
----------	-------------	--------------

XCKP Snap Action Limit Switches

- Visible operation
- Precise operating points
- Double insulation
- 1 NO and 1 NC contact



447-3418	Metal end plunger	XCKP2110P16
447-3395	Roller lever	XCKP2118P16
447-3430	Horizontal plunger	XCKP2121P16

ZCKM Snap Action Limit Switch

- 1 N/O (aux) and 1 N/C (safety) contacts
- Rating: 240 Vac, 3A
- Protected to IP65



360-8562	NO/NC, 240V	ZCKM1H29
----------	-------------	----------

XCKM Roller Plunger Limit switch

- 1 N/O (aux) and 1 N/C (safety) contacts
- Rating: 240 Vac, 3A
- Protected to IP65



235-981	NO/NC, 240V	XCKM102H29
---------	-------------	------------

XCKS Snap Action Limit Switches

- Rated 240V 3A at AC15 10A lth
- Snap action NC contacts with positive opening operation
- -25 to +70°C operating temperature
- Protected to IP66



243-780	Roller plunger actuator	XCKS102H29
236-029	Roller lever actuator	XCKS131H29

Contact Block

- Contact Blocks for XCKJ/XCKM/XCKS Limit Switch Ranges



360-8685	NO/NC, 240V	XE2SP2151
----------	-------------	-----------

XC Plunger Snap Action Limit Switch

- Visible operation
- Precise operating points
- Double insulation
- 1 NO and 1 NC contact



447-3840	NO/NC, 240V	XCMD2102L1
----------	-------------	------------

ZCKJ Snap Action Limit Switch Body

- Limit Switch Body
- Silver plated contacts with snap action
- 2 Poles
- Durable and strong housing



700-4324	2NO/2NC, 240V	ZCKJ2H29
360-8433	NO/NC, 240V	ZCKJ11H29

Limit switch heads



360-8629	Steel roller plunger	ZCKD02
360-8663	Plastic horizontal roller plunger	ZCKD21
360-8506	Steel roller plunger reinforced	ZCKE67
360-8641	Plastic roller lever	ZCKD15



Do you want help to knock down your costs?

It's easy

You don't need to spend time comparing prices for your entire order. Just give us your bill of materials or existing manufacturer part number & we'll do it all for you.

We've got all you need with FREE* fast delivery

With over 500,000 products available you won't need to call around lots of separate or specialist suppliers.

*Free delivery available. See au.rs-online.com/delivery for details.

Contact us to discuss how we can help you save:



PrefNZ@rs-components.com



0800 888 780

